

Wall Spot

Wall mounted directional light (GU10)



General Information

The adjustable Wall Spot is for mounting on timber, masonry and stone delivering directional light for pathways, decking and structural elements of a building.

Alternatively the Wall Spot can be positioned at a lower level and used as a wall mounted uplighter where it's not possible to use a ground mounted uplighter.

The Wall Spot has a fully adjustable head allowing 360° rotation and 0-90° elevation.

IP Rating

IP66

Light Source - GU10 6w LED Lamp

Input 90-260 volt, 5 watts

Beam Angle

25, 45, or 60°

Lamp Output

320 lumens

Colour Temperature

3000k

Lamp Life

Up to 30,000 hours

Finishes

Copper

316L Stainless Steel

Powder Coated Aluminium:

-  Hawthorn Green
-  Olive Green
-  Bronze
-  Black
-  Dark Grey
-  Silver Star
-  White

Options


Cable Joint Kit - CJK150

(available in single kits or packs of 5)

Glare Guard - GG

Frosted Lens - LENSSTEPF

Hex Cell Louvre Adapter - HCL

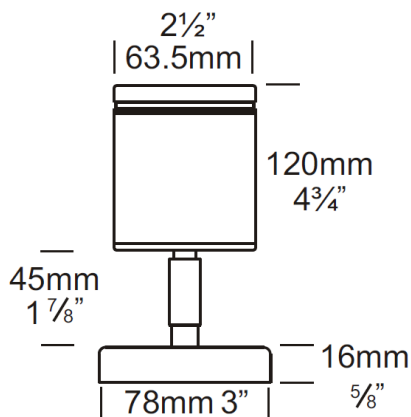

Glare Guard



Frosted Lens



Hex Cell Louvre Adapter

The colour chart shown should be used as a guide only as your monitor and printer settings may alter the colours.