


Air Butterfly

Adjustable Surface Mounted Spotlight

Origin

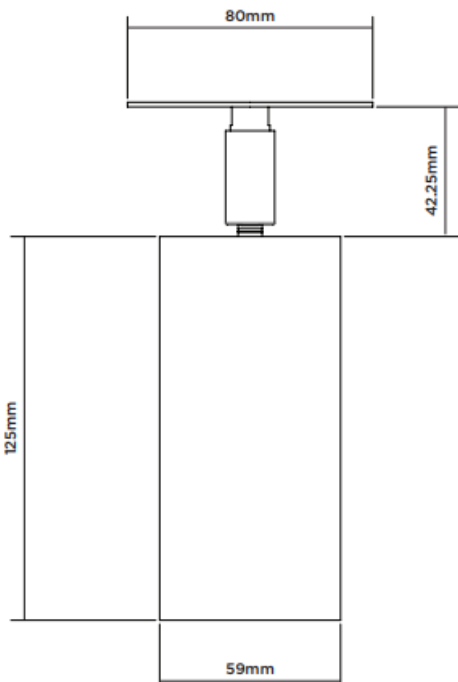

Overview

A small, high output adjustable surface mounted spotlight available in a range of finishes. Minimal ceiling plate with spring ceiling retention

The light engine utilises a bespoke phosphor LED to deliver an exceptionally high average colour rendering (CRI : 98) and the best red rendering available worldwide (R9 : 99)

2700K	Spot	Medium	Wide	Flood
Beam Width	10°	28°	40°	45°
Initial Lumens*	624	1077	1077	1077
Engine Lumens*	437	931	931	924
*(Tc 85°, +/-7%)				
Circuit Power (typ)	10.6W	11.6W	11.6W	11.6W

3000K	Spot	Medium	Wide	Flood
Beam Width	10°	28°	40°	45°
Initial Lumens*	661	1156	1156	1156
Engine Lumens*	455	954	984	978
*(Tc 85°, +/-7%)				
Circuit Power (typ)	10.6W	11.6W	11.6W	11.6W

Finishes

Available in a range of standard and bespoke finish options for the whole luminaire. The standard white bezel is RAL9010 fine texture with 20% gloss, however we can offer any other RAL colour (additional charges and setup charges may apply).

The fitting is also available in Polished Chrome, Brushed Chrome, Polished Brass, Antique Brass, Polished Copper, Antique Copper and Antique Bronze.

The anti-glare baffle is Black as standard but can be any RAL paint or a selection of anodised or plated finish (additional charges and setup charges may apply).

Driver Options

Non-dim driver
Mains dimming driver
0-10v dimming driver
DALI driver

Fitting Options

Sea & Spa
Spreader Lens
Anti-glare Honeycomb Louvre
Frosted Lens

LED Colour Temperature

2700K (very warm white)
2938K (warm white)
4000K (by request only)

IP Rating

IP54 as standard.
Optional IP65

50,000 hours to L90 and a 5 year fitting warranty.
Designed and made in the UK.



Notes

Wire in **series** and observe correct polarity.
Do not wire 'live.'

