
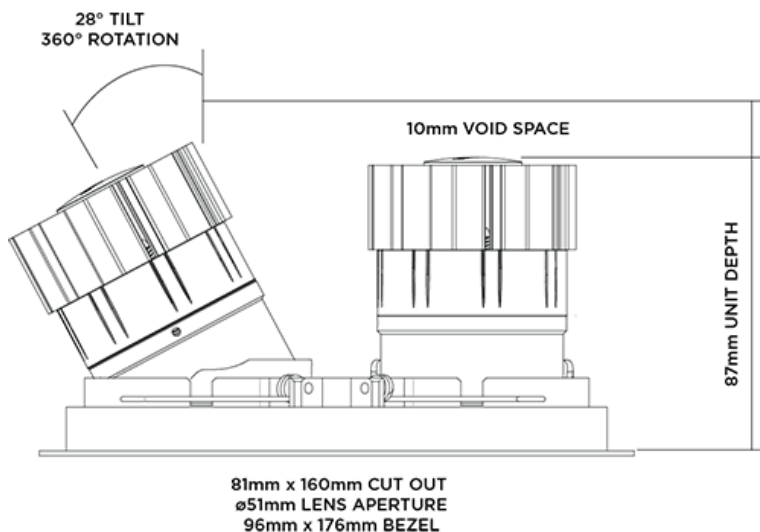


LOOK Tilt & Rotate TWIN

80mm adjustable LED downlight

Origin

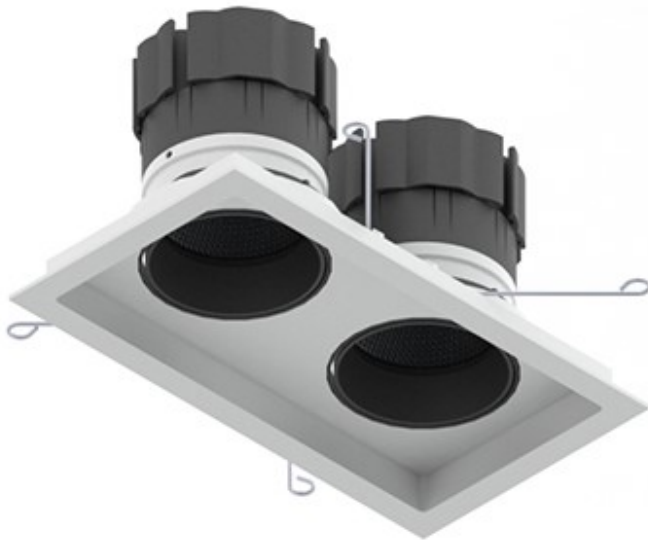

Overview

This twin version of the Look maintains the 28° tilt and 360° rotation. The neat bezel makes the fitting very discrete. It's a versatile downlight suitable for many applications.

The Origin light engine utilises a bespoke phosphor LED to deliver an exceptionally high average colour rendering (CRI : 98) and the best red rendering available worldwide (R9 : 99)

2700K	Spot	Medium	Wide	Flood
Beam Width	10°	28°	40°	45°
Initial Lumens*	624	1077	1077	1077
Engine Lumens*	437	931	931	924
*(Tc 85°, +/-7%)				
Circuit Power (typ)	10.6W	11.6W	11.6W	11.6W

3000K	Spot	Medium	Wide	Flood
Beam Width	10°	28°	40°	45°
Initial Lumens*	661	1156	1156	1156
Engine Lumens*	455	954	984	978
*(Tc 85°, +/-7%)				
Circuit Power (typ)	10.6W	11.6W	11.6W	11.6W

Finishes

Available in a range of standard and bespoke finish options for the whole luminaire. The standard white bezel is RAL9010 fine texture with 20% gloss, however we can offer any other RAL colour (additional charges and setup charges may apply).

The anti-glare baffle is Black as standard but can be any RAL paint or a selection of anodised or plated finish (additional charges and setup charges may apply).

Driver Options

Non-dim driver
Mains dimming driver
0-10v dimming driver
DALI driver

Fitting Options

60 Minute Fire Rating
Spreader Lens
Anti-glare Honeycomb Louvre
Frosted Lens
Constant Torsion Springs

LED Colour Temperature

2700K (very warm white)
2938K (warm white)
4000K (by request only)

IP Rating

IP54 as standard.
Optional IP65 (with gaiter)

Notes

Wire in **series** and observe correct polarity.
Do not wire 'live.'

50,000 hours to L90 and a 5 year fitting warranty.

Designed and made in the UK.



Unit 9, Severfield Close, Thirsk Industrial Park, THIRSK, YO7 3BX

web: www.brilliantlighting.co.uk

tel: 01845 525664